

4K H.265 Mini PoE NVR 1000 Series

















DATASHEET

KEY FEATURES

- ▶ Powerful Decoding Capacity (Maximum supporting 8*1080P or 9*720P network cameras viewing at the same time.)
- ▶ 3.5"HDD (1 SATA of 3.5"HDD, providing 10TB hard disk storage.)
- Exquisite Structure & Easy Installation (115mm*115mm*180mm sizes, exquisite design and easy to install.)
- Revolutionary Thermal Design (The aluminum casing serves as a heat sink and the ventilation holes on rear and bottom panels maximize airflow and carry the heat easily.)

Plug and Play


Milesight 9-CH Mini PoE NVR features 4 independent PoE ports. The NVR will automatically detect, configure and play the live view of the network cameras once the cable is plugged.



H.265+H.264

Smartly figure out and switch between H.264 and H.265 automatically. It will extend the days to save recording file with H.265 than with other compressions.





4K Ultra HD

Milesight 4K Mini NVR is a patent design 9-CH NVR which can work with all ONVIF-compliant IP cameras, supporting dual stream, and up to 4K definition.



Excellent Heat Dissipation

Ventilation holes on rear and bottom panels, an fan inside Mini PoE NVR drives airflow, offering excellent performance of cooling and ensuring great protection for components. The aluminum casing united a special panel on bottom improves the effect of heat dissipation.



4K H.265 Mini PoE NVR 1000 Series




| Model | | MS-N1009-UPT |
|----------------------------|---------------------------------|--|
| Video/Audio Input | Network Video Input | 9-CH |
| | Bandwidth | 90Mbps |
| Video/Audio Output | HDMI Output | 1-CH, Resolution: 3840x2160/30Hz, 1920x1080/60Hz, 1920x1080/50Hz, 1280x1024/60H, 1280x720/60Hz, 1024x768/60Hz HDMI Supports Audio Output |
| | Dual Stream | Support |
| | Recording Resolution | 8MP/6MP/5MP/4MP/3MP/1080P/UXGA/720P/D1/VGA/CIF/QCIF |
| | Synchronous Preview/Playback | 2*(30fps @8MP), 4*(20fps @4MP), 5*(30fps @3MP), 8*(30fps @1080P), 9*(30fps @720P) |
| | Video Compression | H.265(HEVC)/H.264 |
| Video/Audio Compression | Audio Compression | G.711 U-Law |
| | Sample Rate | 8KHz/16KHz |
| | Synchronous Recording | 9*4MP |
| Storage | Driver | 1*SATA HDD(3.5") |
| | Capacity | Up to 10TB capacity for each HDD |
| Recording Management | Recording | Manual Recording, Timing Recording, Motion Detection Recording |
| | Snapshot | Manual Snapshot |
| | Playback | Video Playback, Image Playback |
| Backup | Backup | Video Backup, Image Backup |
| Network | Protocol | IPv4, HTTP, NTP, SMTP, PPPoE, DDNS |
| External Interface | Network Interface | 1*RJ45 100M/1000M |
| | USB Interface | 2*USB 2.0 |
| PoE Interface | Interface | 4*RJ45 10M/100M |
| | Power Output | ≤40W |
| | Supported Standard | IEEE 802.3af |
| General | Power Supply | DC 48V 1.25A |
| | Consumption | ≤6W(Without HDD, without enabling PoE) |
| | Working Conditions | Temperature: 0°C~+40°C Humidity: 10%~90% |
| | Dimensions | 115mm(W)×115mm(D)×180mm(H) |
| | Weight | 1.5Kg |
| | Warranty | 3/5 Years |


V7.02




Interfaces

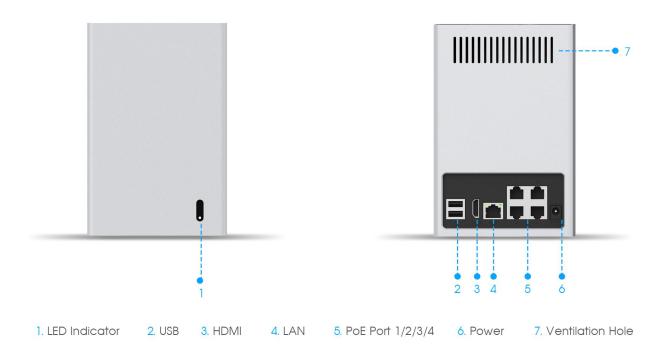

Structure Diagrams





Units: mm

Naming Convention



Milesight Technology Co.,Ltd.

Add: No.23 Wanghai Road, 2nd Software Park, Xiamen, China

Mail:sales@milesight.com

www.milesight.com



HEADQUARTERS







